

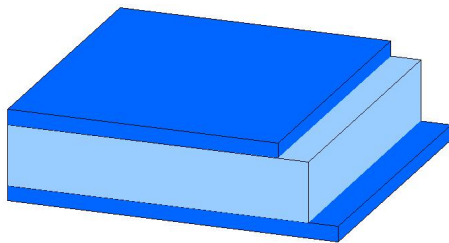





Polyfilm Polyplex Polyester Films

Type: CF100 (clear PET) 100my

Polyfilm clear CF100 grade Polyester film is designed as base film for various technical and industrial applications providing high dimensional stability. It has good transparency, excellent machinability, sparkling gloss, flexibility and chemical resistance.

Composition



-  standard surface
-  core layer
-  standard surface

Typical Properties

Provisional data

Property	Units	Nominal	Method	Conditions
Mechanical Properties				
Nominal thickness	μ	100	Polyplex Method	
Unit weight	g/m ²	140.0		
Yield	m ² /kg	7.1	Polyplex Method	
Elongation at break	MD %	160	ASTM D-882	
	TD %	150		
Tensile strength	MD kg/cm ²	1800	ASTM D-882	
	TD kg/cm ²	1900		
Thermal Properties				
Heat shrinkage	MD %	1.4	ASTM D-1204	150 Deg. C/30 min.
	TD %	0.0		

Property	Units	Nominal	Method	Conditions
Surface Properties				
Surface tension	Dyne/cm	42	ASTM D-2578	
Co-efficient of friction (A/B) static		0.45	ASTM D-1894	
Co-efficient of friction (A/B) dynamic		0.40	ASTM D-1894	
Physical/Chemical Properties				
Light transmission	%	90.0	ASTM D-1003	
Optical Properties				
Haze	%	1.4	ASTM D-1003	

Disclaimer

The information given above is to the best of our knowledge and experience at the time of printing. We make no warranty, express or implied, for specific product properties or as to the fitness of the product for any specific use or purpose. The above data is purely for reader's consideration, investigation and verification and should be read in conjunction with the general conditions for sale.

Edition: 8/2013