

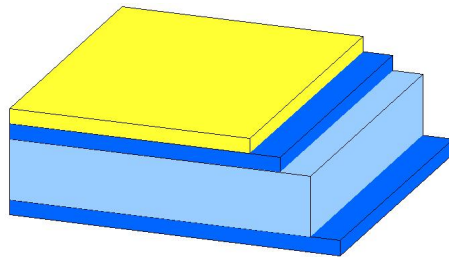






## Polyfilm Polyplex Polyester Films

### Type: CF102 (clear PET) 100my

Polyfilm clear CF102 grade Polyester film is designed as base film for various technical and industrial applications providing high dimensional stability. One side is pretreated for improved slip and provides good adhesion to various ink and coating systems. It has good transparency, excellent machinability, sparkling gloss, flexibility and chemical resistance.

### Composition



-  treated surface
-  standard surface
-  core layer
-  standard surface

### treatment

CF102: clear film, ink adherable coating outside CF120: Clear film, ink adherable coating inside

### Typical Properties

Provisional data

Property	Units	Nominal	Method	Conditions
Mechanical Properties				
Nominal thickness	$\mu$	100	Polyplex Method	
Unit weight	$g/m^2$	140.0		
Yield	$m^2/kg$	7.1	Polyplex Method	
Elongation at break	MD %	160	ASTM D-882	
	TD %	150		
Tensile strength	MD $kg/cm^2$	1800	ASTM D-882	
	TD $kg/cm^2$	1900		

Property	Units		Nominal	Method	Conditions
<b>Thermal Properties</b>					
Heat shrinkage	MD	%	1.4	ASTM D-1204	150 Deg. C/30 min.
	TD	%	0.2		
<b>Surface Properties</b>					
Surface tension	Dyne/cm		42	ASTM D-2578	
Co-efficient of friction (A/B) static			0.45	ASTM D-1894	
Co-efficient of friction (A/B) dynamic			0.40	ASTM D-1894	
<b>Physical/Chemical Properties</b>					
Light transmission	%		90.0	ASTM D-1003	
<b>Optical Properties</b>					
Haze	%		1.4	ASTM D-1003	

## Disclaimer

The information given above is to the best of our knowledge and experience at the time of printing. We make no warranty, express or implied, for specific product properties or as to the fitness of the product for any specific use or purpose. The above data is purely for reader's consideration, investigation and verification and should be read in conjunction with the general conditions for sale.

Edition: 8/2013