




Polyfilm Polyplex Polyester Films

Type: CF102 (clear PET) 250my

Polyfilm clear CF102 grade Polyester film is designed as base film for various technical and industrial applications providing high dimensional stability. One side is pretreated for improved slip and provides good adhesion to various ink and coating systems. It has good transparency, excellent machinability, sparkling gloss, flexibility and chemical resistance.

Composition

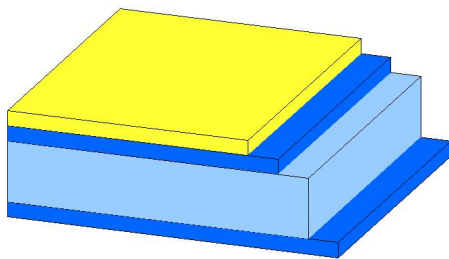

- treated surface
- standard surface
- core layer
- standard surface

treatment

CF102: clear film, ink adherable coating outside CF120: Clear film, ink adherable coating inside

Typical Properties

Provisional data

Property	Units	Nominal	Method	Conditions
Mechanical Properties				
Nominal thickness	μ	250	Polyplex Method	
Unit weight	g/m ²	350.0		
Yield	m ² /kg	2.85	Polyplex Method	
Elongation at break	MD %	170	ASTM D-882	
	TD %	160		
Tensile strength	MD kg/cm ²	1800	ASTM D-882	
	TD kg/cm ²	1900		

Property	Units		Nominal		Method	Conditions
Thermal Properties						
Heat shrinkage	MD	%	1.2	ASTM D-1204		150 Deg. C/30 min.
	TD	%	0.2			
Surface Properties						
Surface tension	Dyne/cm		42	ASTM D-2578		
Co-efficient of friction (A/B) static			0.45	ASTM D-1894		
Co-efficient of friction (A/B) dynamic			0.40	ASTM D-1894		
Physical/Chemical Properties						
Light transmission	%		90.0	ASTM D-1003		
Optical Properties						
Haze	%		2.0	ASTM D-1003		

Disclaimer

The information given above is to the best of our knowledge and experience at the time of printing. We make no warranty, express or implied, for specific product properties or as to the fitness of the product for any specific use or purpose. The above data is purely for reader's consideration, investigation and verification and should be read in conjunction with the general conditions for sale.

Edition: 8/2013