

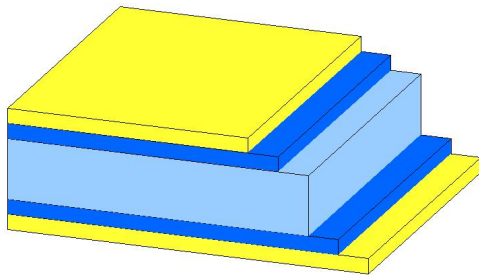







Polyfilm Polyplex Polyester Films

Type: CF122 (clear PET) 175my

Polyfilm high clarity CF grade Polyester film is designed as base film for technical and industrial applications. Both sides are chemically treated for improved slip and handelability. Treated surface is suitable for adhesion to solvent based inks and coatings. The film is also used in packaging particularly for window application.

Composition



-  chemical treatment
-  modified surface
-  core layer
-  modified surface
-  chemical treatment

treatment

CF122: Clear film, both side ink adherable coating

Typical Properties

Provisional data

Property	Units	Nominal	Method	Conditions
Mechanical Properties				
Nominal thickness	μ	175	Polyplex Method	
Unit weight	g/m ²	245.0		
Yield	m ² /kg	4.08	Polyplex Method	
Elongation at break	MD %	170	ASTM D-882	
	TD %	160		
Tensile strength	MD kg/cm ²	1800	ASTM D-882	
	TD kg/cm ²	1900		

Property	Units		Nominal	Method	Conditions
Thermal Properties					
Heat shrinkage	MD	%	1.2	ASTM D-1204	150 Deg. C/30 min.
	TD	%	0.2		
Surface Properties					
Surface tension	Dyne/cm		42	ASTM D-2578	
Co-efficient of friction (A/B) static			0.45	ASTM D-1894	
Co-efficient of friction (A/B) dynamic			0.40	ASTM D-1894	
Physical/Chemical Properties					
Light transmission	%		90.0	ASTM D-1003	
Optical Properties					
Haze	%		1.7	ASTM D-1003	

Disclaimer

The information given above is to the best of our knowledge and experience at the time of printing. We make no warranty, express or implied, for specific product properties or as to the fitness of the product for any specific use or purpose. The above data is purely for reader's consideration, investigation and verification and should be read in conjunction with the general conditions for sale.

Edition: 8/2013