




From the datasheet collection at <http://www.polyfilmambalaj.com>

Polyfilm Polyplex Polyester Films

Type: CF188 clear PET film 50my

Polyfilm CF188 grade Polyester film is designed as base film for high clarity industrial applications. Both side are antistatic pretreated and provide adhesion for various inks and coating. CF188 has high dimensional stability and offers good transparency, excellent machinability, sparkling gloss and chemical resistance.

Composition

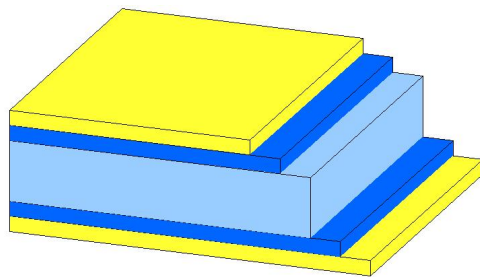

- antistatic treatment
- modified surface
- core
- modified surface
- antistatic treatment

treatment

CF188 - clear film, both side ink adherable antistatic coating

Typical Properties

Property	Units	Nominal	Method	Conditions
Mechanical Properties				
Nominal thickness	μ	50	Polyplex Method	
Yield	m^2/kg	14.3	Polypex Method	
Unit weight	g/m^2	70		
Density	g/cm^3	1.4		
Elongation at break	MD %	150	ASTM D-882	
	TD %	140		
Tensile strength	MD kg/cm^2	1900	ASTM D-882	
	TD kg/cm^2	2000		

Property	Units		Nominal	Method	Conditions
Thermal Properties					
Heat shrinkage	MD	%	1.4	ASTM D-1204	150 Deg. C/30 minutes
	TD	%	0.2		
Surface Properties					
Co-efficient of friction (A/B) static			0.45	ASTM D-1894	
Co-efficient of friction (A/B) dynamic			0.40	ASTM D-1894	
Optical Properties					
Light transmission		%	90	ASTM D-1003	
Haze		%	1.3	ASTM D-1003	

Standard Roll Presentation

Thickness μ	Core mm	Length m	outside diameter mm
50	76	3000	460
50	152	4500	585
50	152	6000	665

Disclaimer

The information given above is to the best of our knowledge and experience at the time of printing. We make no warranty, express or implied, for specific product properties or as to the fitness of the product for any specific use or purpose. The above data is purely for reader's consideration, investigation and verification and should be read in conjunction with the general conditions for sale.

Edition: 9/2013