



# POLYFILM

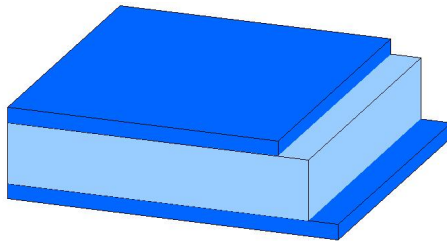
From the datasheet collection at <http://www.polyfilmambalaj.com>




## Polyfilm Polyplex Polyester Films

### Type: MW100 (milky white PET) 150my

Polyfilm Milky White MW100 grade Polyester film specially developed as an insulating material for rotating electrical motors, exhibits superior thermal ageing performance compared to normal polyester films. It has excellent slip and dimensional stability over a wide range of temperatures.

### Composition



-  standard surface
-  core layer
-  standard surface

### Typical Properties

Provisional data

Property	Units	Nominal	Method	Conditions
<b>Mechanical Properties</b>				
Nominal thickness	μ	150	Polyplex Method	
Unit weight	g/m <sup>2</sup>	210		
Yield	m <sup>2</sup> /kg	4.76	Polyplex method	
Elongation at break	MD %	200	ASTM D-882	
	TD %	180		
Tensile strength	MD kg/cm <sup>2</sup>	1600	ASTM D-882	
	TD kg/cm <sup>2</sup>	1700		
<b>Thermal Properties</b>				
Heat shrinkage	MD %	1.2	ASTM D-1204	150 Deg. C/30 min.
	TD %	0.4		

Property	Units	Nominal	Method	Conditions
<b>Surface Properties</b>				
Surface tension	Dyne/cm	42	ASTM D-2578	
Co-efficient of friction (A/B) static		0.38	ASTM D-1894	
Co-efficient of friction (A/B) dynamic		0.28	ASTM D-1894	
<b>Physical/Chemical Properties</b>				
Light transmission	%	73	ASTM D-1003	
<b>Optical Properties</b>				
Haze	%	75.0	ASTM D-1003	
<b>Electrical Properties</b>				
Break down voltage	KV	19.0	ASTM D-149	
Surface resistivity	Ohm	10 <sup>12</sup>	ASTM D-149	
Volume resistivity	Ohm cm	10 <sup>16</sup>	ASTM D-149	

## Disclaimer

The information given above is to the best of our knowledge and experience at the time of printing. We make no warranty, express or implied, for specific product properties or as to the fitness of the product for any specific use or purpose. The above data is purely for reader's consideration, investigation and verification and should be read in conjunction with the general conditions for sale.

Edition: 8/2012