



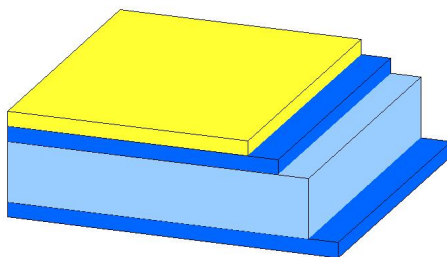
From the datasheet collection at <http://www.polyfilmambalaj.com>





Polyfilm Polyplex Polyester Films

Type: S56 (chemically treated copolymer) 36my

Polyfilm S56 Polyester film is designed to enhance adhesion to various inks and coatings. On metallising the chemically treated side, it shows enhanced metal adhesion. It is used in flexible packaging and metallising applications which require increased bond strength and adhesion. S56 is generally not suitable for laminates which have to be resistant to pasteurisation or boiling water or for steam sterilisation. Do not corona treat the chemically treated surface, since this would destroy the adhesion properties.

Composition



-  chemical treatment
-  standard surface
-  core
-  standard surface

Treatment

S56O = copolymer treated outside S56I = copolymer treated inside

Typical Properties

Property	Units	Nominal	Method	Conditions
Mechanical Properties				
Nominal thickness	μ	36.0	PTL Method	
Tensile strength	MD	kg/cm ²	2000	ASTM D-882
	TD	kg/cm ²	2100	
Elongation at break	MD	%	140	ASTM D-882
	TD	%	130	

Property	Units	Nominal	Method	Conditions
Thermal Properties				
Heat shrinkage	MD %	2.0	ASTMD-1204	150 Deg. C/30 min.
	TD %	0.0		
Surface Properties				
Co-efficient of friction static		0.45	ASTMD-1894	
Co-efficient of friction dynamic		0.38		
Surface tension (chemically treated side)	Dyne/cm	54	ASTM D-2578	
Surface tension (plain side)	Dyne/cm	42	ASTM D-2578	
Physical/Chemical Properties				
Light transmission	%	89	ASTM D-1003	
Optical Properties				
Haze	%	3.5	ASTM D-1003	
Gloss at 60 Deg.	%	160		
Barrier Properties				
WVTR	g/m ² day	10	ISO 15106-I: 03	23 Deg. 0% RH
O2 Permeability	cm ³ /m ² day	45	ASTM D-3985-95	23 Deg. 0% RH
Electrical Properties				
Break down Voltage	KV	7.0	ASTM D-149	

Standard Roll Presentation

Thickness	Core	Length	outside diameter
μ	mm	m	mm
36	76	4500	480
36	152	6000	570
36	152	8000	650

Disclaimer

The information given above is to the best of our knowledge and experience at the time of printing. We make no warranty, express or implied, for specific product properties or as to the fitness of the product for any specific use or purpose. The above data is purely for reader's consideration, investigation and verification and should be read in conjunction with the general conditions for sale.

Edition: 3/2005