

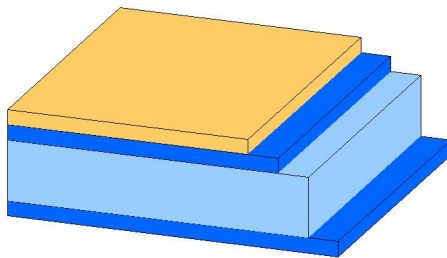






Polyfilm Polyplex Polyester Films

Type: TIC (isotropic corona treated) 12my

Polyfilm Transparent TIC grade Polyester film is designed for use in applications which needed more dimensional uniformity of physical properties.

Composition



-  corona treatment
-  standard surface
-  core
-  standard surface

Typical Properties

Property	Units	Nominal	Method	Conditions
Mechanical Properties				
Nominal thickness	μ	12	PTL Method	
Elongation at break	MD %	140	ASTM D-882	
	TD %	120		
Tensile strength	MD kg/cm ²	2200	ASTM D-882	
	TD kg/cm ²	2300		
Thermal Properties				
Heat shrinkage	MD %	1.80	ASTM D-1204	150 Deg. C/30 min.
	TD %	0.40		
Surface Properties				
Co-efficient of friction static		0.52	ASTM D-1894	
Co-efficient of friction dynamic		0.42	ASTM D-1894	

Property	Units	Nominal	Method	Conditions
Surface tension TI (plain film)	dyne/cm	42	ASTM D-2578	
Surface tension TIC (corona treated film)	dyne/cm	56	ASTM D-2578	
Physical/Chemical Properties				
Density	g/cm ³	1.4		
Optical Properties				
Haze	%	2.3	ASTM D-1003	
Light transmission	%	88	ASTM D-1003	
Barrier Properties				
WVTR	g/m ² day	40	ISO 15106-I: 03	37.7 Deg. 90% RH
O2 Permeability	cc/m ² day	130	ASTM D-3985-95	23 Deg. 0% RJ
Yield Properties				
Yield	m ² /kg	59.6	Polyplex Method	

Standard Roll Presentation

Thickness μ	Core mm	Length m	outside diameter mm
12	152	24000	650
12	152	36000	785

Disclaimer

The information given above is to the best of our knowledge and experience at the time of printing. We make no warranty, express or implied, for specific product properties or as to the fitness of the product for any specific use or purpose. The above data is purely for reader's consideration, investigation and verification and should be read in conjunction with the general conditions for sale.

Edition: 6/2015