

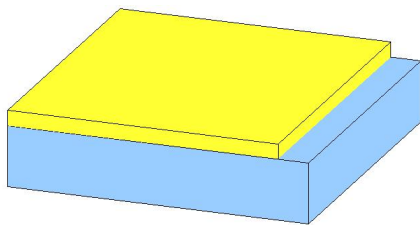




## Polyfilm Polyplex Polyester Films

### Type: TWL102 - White Lidding Film (acrylic treated) 55my

Polyfilm TWL102 Polyester film is designed for use in lidding and other packaging applications. It has good opacity and excellent machinability. TWL102 provides excellent slip, flatness, puncture resistance and dimensional stability over a wide range of temperatures. The film has an acrylic treatment on one side to enhance adhesion to various coatings and printing inks. The film complies with EU regulations for food contact applications.

### Composition



-  acrylic treatment
-  Polyester layer

### treatment

TWL102: Outside chemically treated

### Typical Properties

Provisional data

Property	Units	Nominal	Method	Conditions
Mechanical Properties				
Nominal thickness	μ	55	Polyplex Method	
Yield	m <sup>2</sup> /kg	12.9	Polyplex Method	
Unit weight	g/m <sup>2</sup>	77.0		
Elongation at break	MD %	150	ASTM D-882	
	TD %	100		
Tensile strength	MD kg/cm <sup>2</sup>	1500	ASTM D-882	
	TD kg/cm <sup>2</sup>	1900		

Property	Units	Nominal	Method	Conditions
<b>Thermal Properties</b>				
Heat shrinkage	MD	%	1.0	ASTM D-1204
	TD	%	1.2	
<b>Surface Properties</b>				
Surface tension (treated surface)	Dyne/cm	42	ASTM D-2578	
Co-efficient of friction (A/B) static		0.34	ASTM D-1894	
Co-efficient of friction (A/B) dynamic		0.30	ASTM D-1894	
<b>Optical Properties</b>				
Gloss	%	105	ASTM D-2457	60 Deg.
Light transmission	%	27.0	ASTM D-1003	

## Disclaimer

The information given above is to the best of our knowledge and experience at the time of printing. We make no warranty, express or implied, for specific product properties or as to the fitness of the product for any specific use or purpose. The above data is purely for reader's consideration, investigation and verification and should be read in conjunction with the general conditions for sale.

Edition: 1/2013