

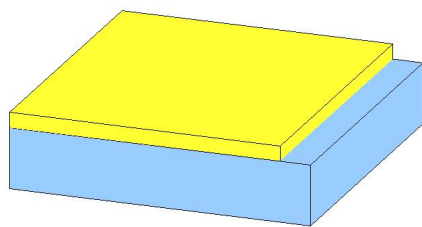




Polyfilm Polyplex Polyester Films

Type: TWL102 - White Lidding Film (acrylic treated) 65my

Polyfilm TWL102 Polyester film is designed for use in lidding and other packaging applications. It has good opacity and excellent machinability. TWL102 provides excellent slip, flatness, puncture resistance and dimensional stability over a wide range of temperatures. The film has an acrylic treatment on one side to enhance adhesion to various coatings and printing inks. The film complies with EU regulations for food contact applications.

Composition



-  acrylic treatment
-  Polyester layer

treatment

TWL102: Outside chemically treated

Typical Properties

Provisional data

Property	Units	Nominal	Method	Conditions
Mechanical Properties				
Nominal thickness	μ	65	Polyplex Method	
Yield	m ² /kg	10.98	Polyplex Method	
Unit weight	g/m ²	91.0		
Elongation at break	MD %	160	ASTM D-882	
	TD %	110		
Tensile strength	MD kg/cm ²	1450	ASTM D-882	
	TD kg/cm ²	1850		

Property	Units	Nominal	Method	Conditions
Thermal Properties				
Heat shrinkage	MD	%	1.0	ASTM D-1204 150 Deg. C/30 min.
	TD	%	1.2	
Surface Properties				
Surface tension (treated surface)	Dyne/cm	42	ASTM D-2578	
Co-efficient of friction (A/B) static		0.34	ASTM D-1894	
Co-efficient of friction (A/B) dynamic		0.32	ASTM D-1894	
Optical Properties				
Gloss	%	105	ASTM D-2457	60 Deg.
Light transmission	%	25.0	ASTM D-1003	

Disclaimer

The information given above is to the best of our knowledge and experience at the time of printing. We make no warranty, express or implied, for specific product properties or as to the fitness of the product for any specific use or purpose. The above data is purely for reader's consideration, investigation and verification and should be read in conjunction with the general conditions for sale.

Edition: 1/2013